



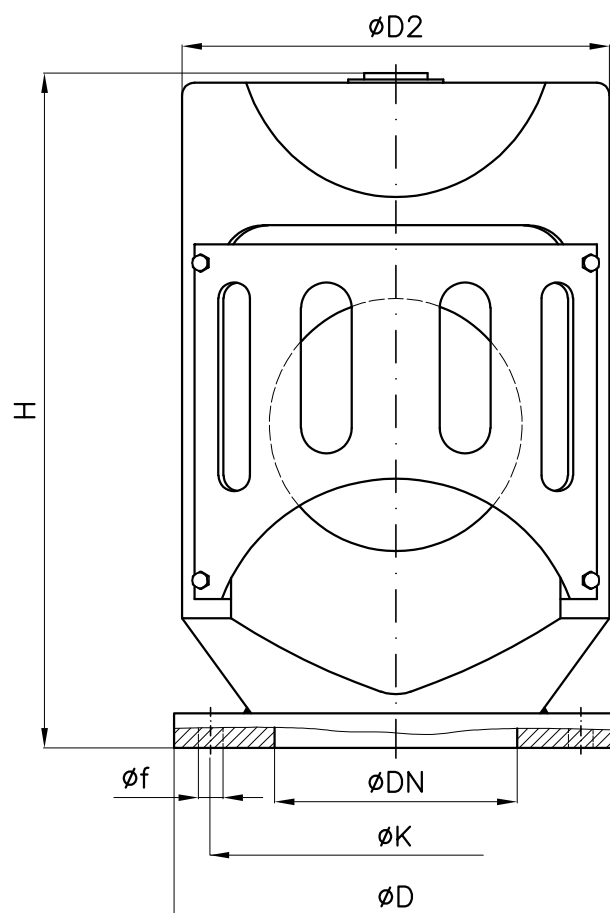

Conform to:
UNI-EN1092

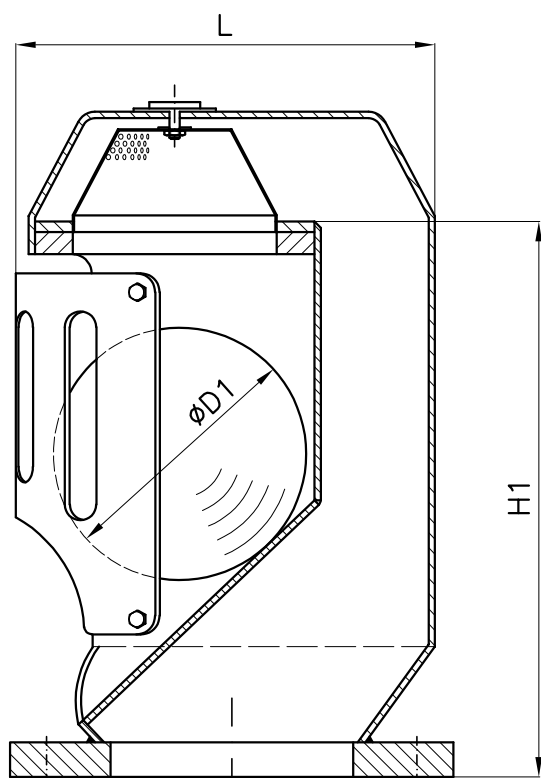

DN	D1	D2	H	H1	L	D	K	f	Holes NO. f	Weight (Kg)	Air Flow max. (m/s)
40	60	121	218	183	115	150	110	18	4	2.4	37.2
50	60	121	215	181	115	165	125	18	4	2.6	17.5
65	75	144	245	203	138	185	145	18	4	3.5	13.5
80	90	164	272	221	162	200	160	18	8	4.2	14.2
100	120	197	317	258	200	220	180	18	8	6	10.3
125	145	232	359	293	231	250	210	18	8	8.2	10.8
150	175	270	405	330	276	285	240	22	8	10.9	8.8
175	200	302	443	360	306	315	270	22	8	14.3	10.8
200	227	342	487	396	346	340	295	22	8	17.8	9
250	300	430	612	480	436	395	350	22	12	28.9	10.6
300	360	560	774	602	566	445	400	22	12	58.4	15.8
350	400	640	867	679	646	505	460	22	16	77.9	13.8
400	480	722	971	770	728	565	515	26	16	99.7	14.5
450	500	750	1094	870	756	615	565	26	20	117.6	12.8

Approved by:

American Bureau of Shipping,
 Bureau Veritas,
 Det Norske Veritas, Germanischer Lloyd,
 Lloyd's Register, Nippon Kaiji Kyokai,
 Registro Italiano Navale,
 Russian Maritime Register of Shipping,
 China Classification Society,
 Korean Register of Shipping.

Combinazione materiali standard – Standard materials Combination			
		AL/PE	AZ/PE
ITEM	DENOMINAZIONE DENOMINATION	MATERIALE MATERIAL	MATERIALE MATERIAL
01	Body	Aluminum ALMG4.5	Galvanized steel
02	Float ball	Polyethylene (PE)	Polyethylene (PE)
Nota: Combinazioni materiali non standard a richiesta Note: Non standard materials combinations on request			