




Valvole sfogo aria WIN2000 HIAS Tank vent check valve WIN2000 HIAS

Tab.211VD

Conform to:
UNI-EN1092
IMO3573

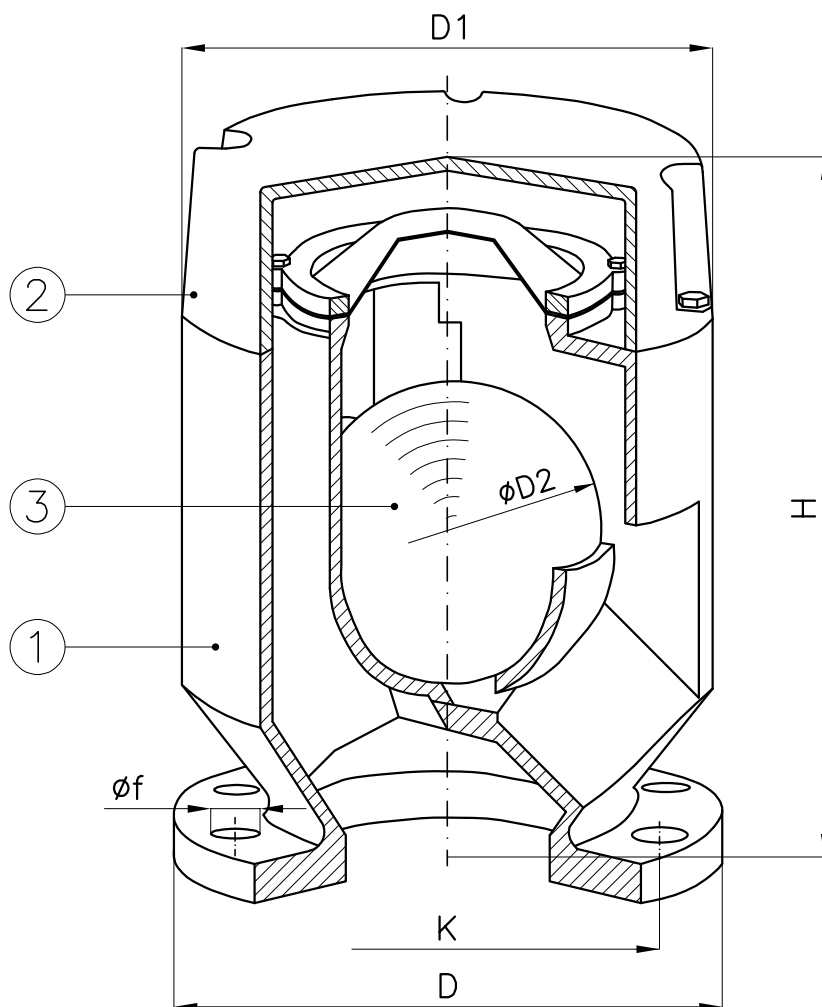

DN	D1	D2	H (~)	PN6				PN10				PN16				Weight (Kg)	Max. inlet air speed (m/s)
				D	K	f	Holes NO. f	D	K	f	Holes NO. f	D	K	f	Holes NO. f		
50	110	60	170	140	110	14	4	165	125	18	4	165	125	18	4	2	17
65	130	75	200	160	130	14	4	185	145	18	4	185	145	18	4	2.75	17.5
80	160	90	230	190	150	18	4	200	160	18	8	200	160	18	8	4	38
100	195	105	275	210	170	18	4	220	180	18	8	220	180	18	8	6.5	58
125	236	130	319	240	200	18	8	250	210	18	8	250	210	18	8	9	59
150	275	155	383	265	225	18	8	285	240	22	8	285	240	22	8	13	42
175	275	155	383	295	255	18	8	315	270	22	8	315	270	22	8	14	42
200	338	200	480	320	280	18	8	340	295	22	8	340	295	22	12	20	27
250	417	250	595	375	335	18	12	395	350	22	12	405	355	26	12	32	15
300	560	325	747	440	395	22	12	445	400	22	12	460	410	26	12	63	39
350	645	360	876	490	445	22	12	505	460	22	16	520	470	26	16	88	36
400	728	400	977	540	495	22	16	565	515	26	16	580	525	30	16	114	27
450	740	480	1146	595	550	22	16	615	565	26	20	640	585	30	20	134	34
500	887	530	1186	645	600	22	20	670	620	26	20	715	650	33	20	180	29

Combinazione materiali standard – Standard materials Combination		
AL/PE		
ITEM	DENOMINAZIONE DENOMINATION	MATERIALE MATERIAL
01	Body	Aluminium EN1706 / DIN1725
02	Bonnet	Aluminium EN1706 / DIN1725
03	Float ball	Polyethylene (PE)
Nota: Combinazioni materiali non standard a richiesta Note: Non standard materials combinations on request		

Approved by:

American Bureau of Shipping, Bureau Veritas,
China Classification Society, Nippon Kaiji Kyokai,
Det Norske Veritas, Germanischer Lloyd, Lloyd's Register,
Registro Italiano Navale,
Inspectie Leefomgeving en Transport,
Turkish Lloyd's, Russian Maritime Register of Shipping.

MEDANA&VISCA