



Valvole sfogo aria WIKO5000 TYPE1-A


Tank vent check valve WIKO5000 TYPE1-A

Tab.211AR

Conform to:
UNI-EN1092
IMO3573

For ND150 to ND400
(NO. 2 float balls)

For ND50 to ND125
(NO. 1 float ball)

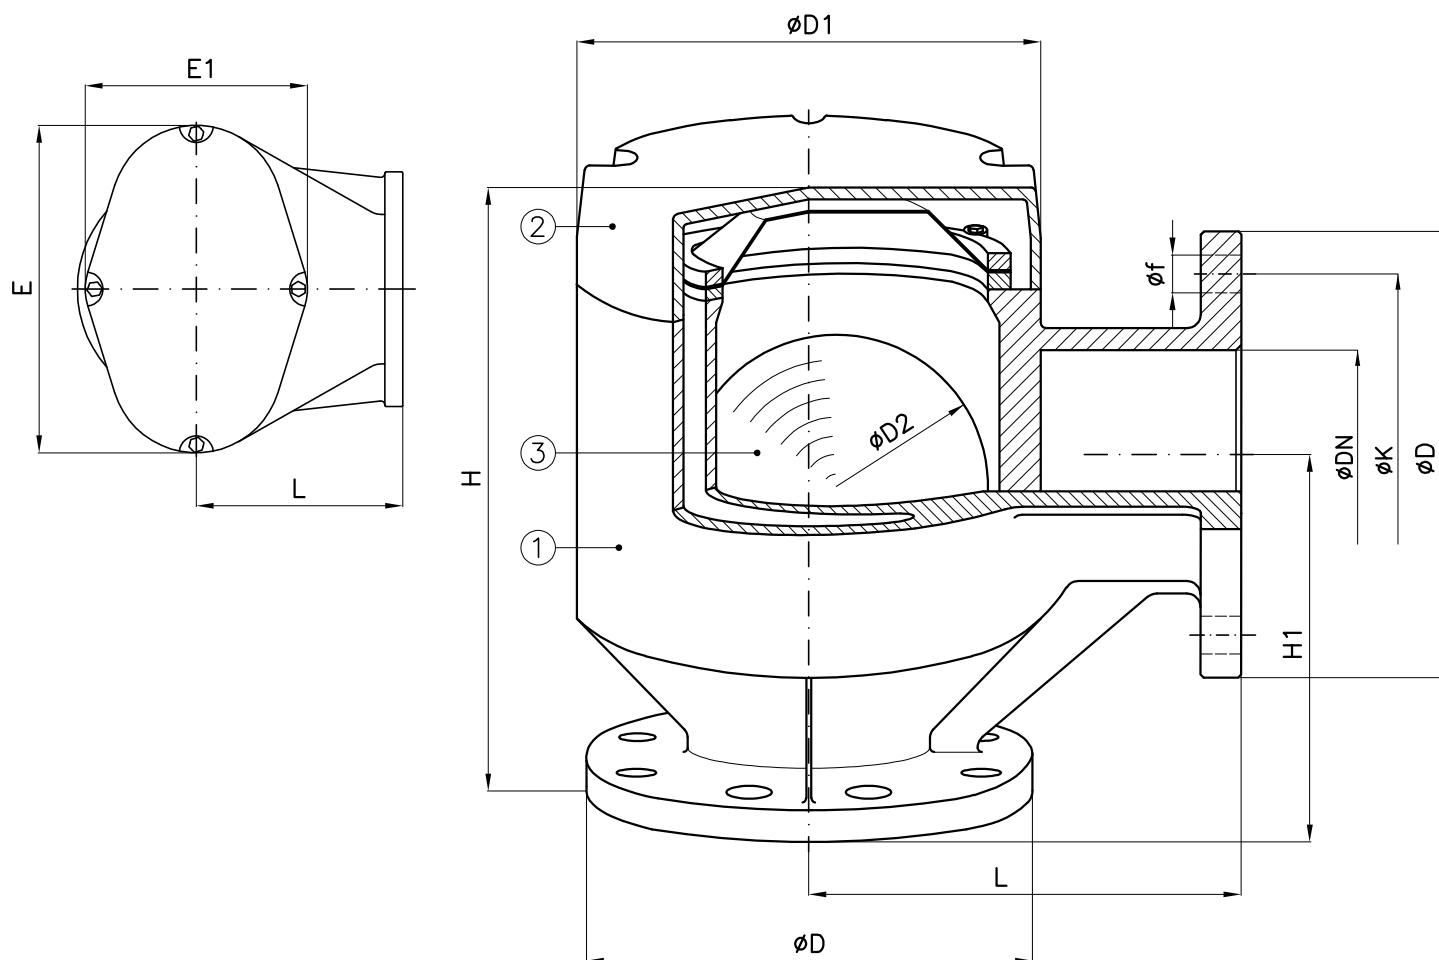

								PN6				PN10				PN16				Weight (Kg)	Max. inlet air speed (m/s)
DN	D1	D2	E	E1	H (~)	H1	L	D	K	f	Holes No. f	D	K	f	Holes No. f	D	K	f	Holes No. f		
50	156	90	—	—	258	105	130	140	110	14	4	165	125	18	4	165	125	18	4	4.5	16.5
65	156	90	—	—	258	112.5	130	160	130	14	4	185	145	18	4	185	145	18	4	5	10
80	156	90	—	—	258	122.5	130	190	150	18	4	200	160	18	8	200	160	18	8	6	7
100	205	130	—	—	342	170	175	210	170	18	4	220	180	18	8	220	180	18	8	10	10
125	205	130	—	—	342	170	175	240	200	18	8	250	210	18	8	250	210	18	8	12	8.5
150	—	130	375	270	375	190	245	265	225	18	8	285	240	22	8	285	240	22	8	22	14
175	—	130	375	270	375	202.5	245	295	255	18	8	315	270	22	8	315	270	22	8	25	14
200	—	130	440	270	437	215	245	320	280	18	8	340	295	22	8	340	295	22	12	30	14
250	—	130	440	270	437	230	245	375	335	18	12	395	350	22	12	405	355	26	12	32	11
300	—	240	610	450	565	270	350	440	395	22	12	445	400	22	12	460	410	26	12	55	15
350	—	240	610	450	565	295	350	490	445	22	12	505	460	22	16	520	470	26	16	57	9.5
400	—	240	610	450	565	270	350	540	495	22	16	565	515	26	16	580	525	30	16	60	10

Combinazione materiali standard – Standard materials Combination		
ITEM	DENOMINAZIONE DENOMINATION	AL/PE MATERIALE MATERIAL
01	Body	Aluminium EN1706 / DIN1725
02	Bonnet	Aluminium EN1706 / DIN1725
03	Float ball	Polyethylene (PE)

Nota: Combinazioni materiali non standard a richiesta
Note: Non standard materials combinations on request

Approved by:

American Bureau of Shipping, Bureau Veritas,
China Classification Society, Nippon Kaiji Kyokai,
Det Norske Veritas, Germanischer Lloyd, Lloyd's Register,
Registro Italiano Navale,
Inspectie Leefomgeving en Transport,
Turkish Lloyd's, Russian Maritime Register of Shipping.

MEDANA&VISCA